



Grease Trap Diagram

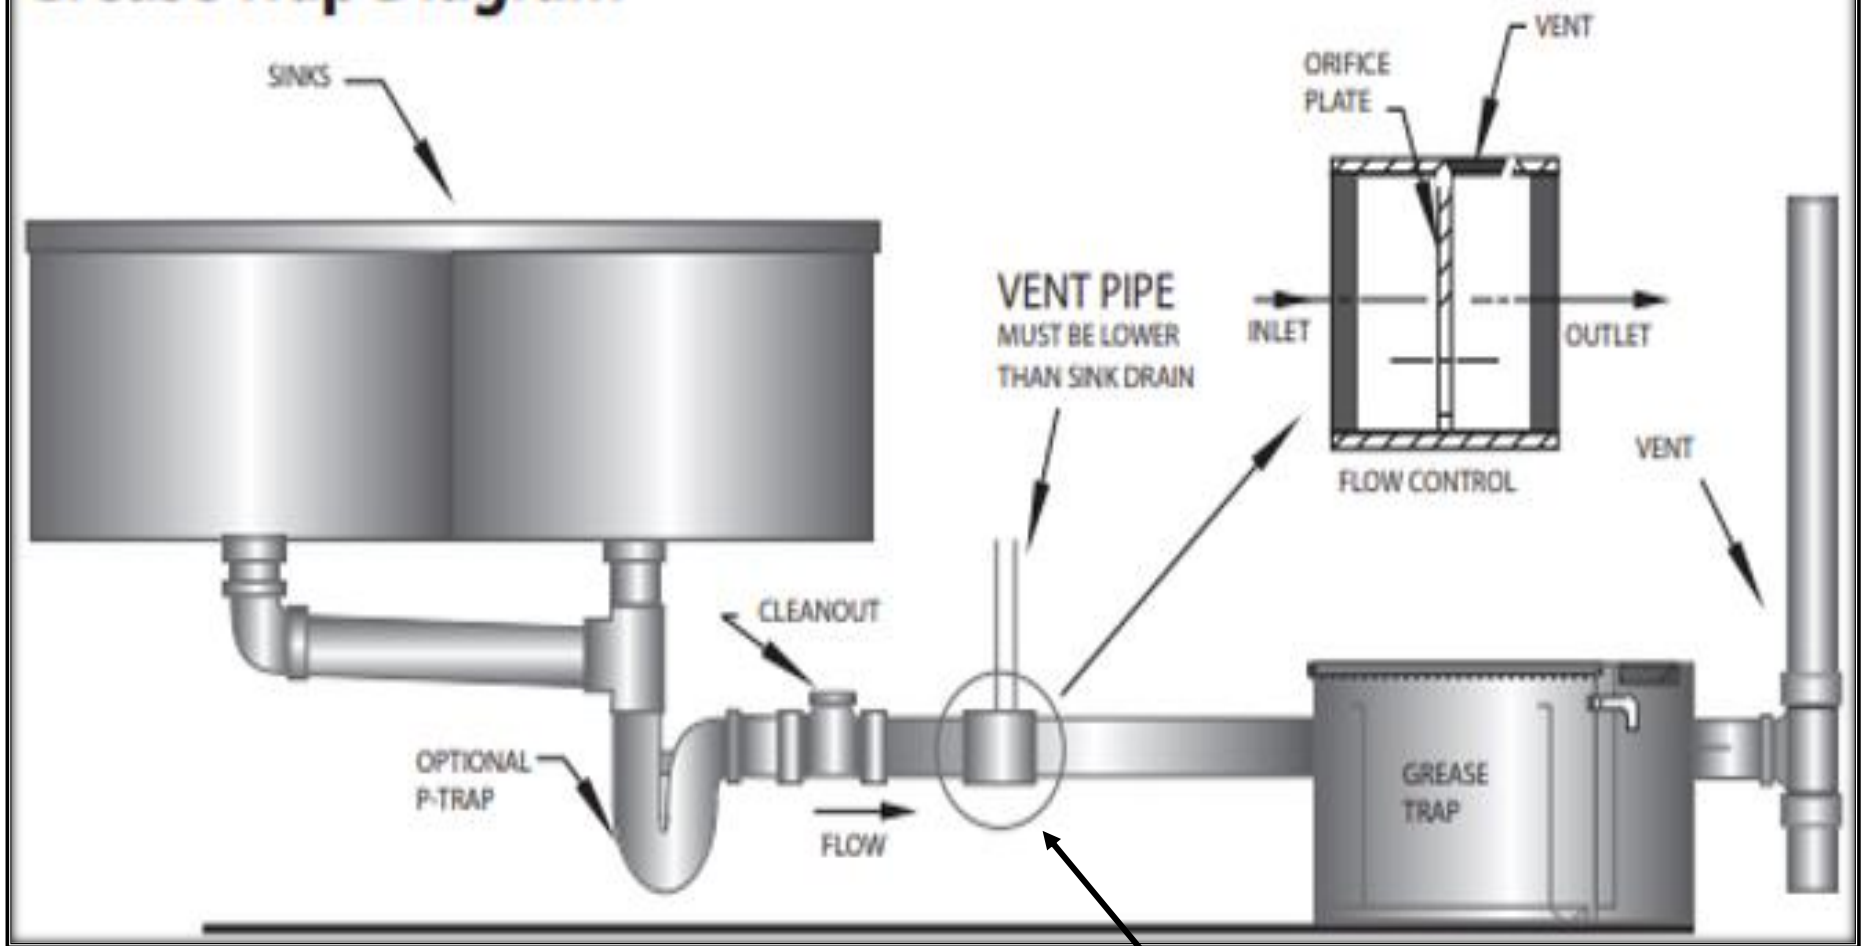

NOTES:

- (1) The minimum size “under the sink” grease trap must be able to handle a throughput of 20 gallons per minute (gpm) with a 40-pound grease storage capacity.
- (2) All “under the sink” grease traps must have a vent and a flow control device to regulate velocity.



FLOW RESTRICTOR
FLOW CONTROL
(FLC SERIES)

